

- High rated current
- Frequency up to 3 MHz
- 125℃
- Low core loss
-
- Halogen Free & ROHS compliant
-
-
-
- Switch and servers
-
-
-
- SSD modules

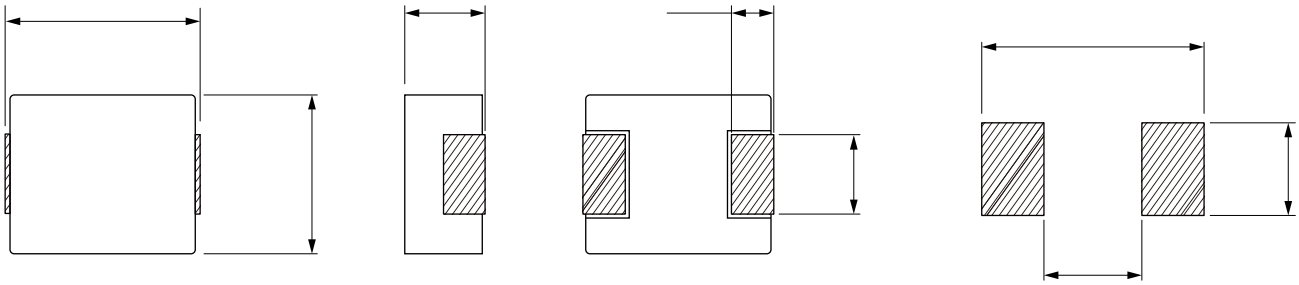

△

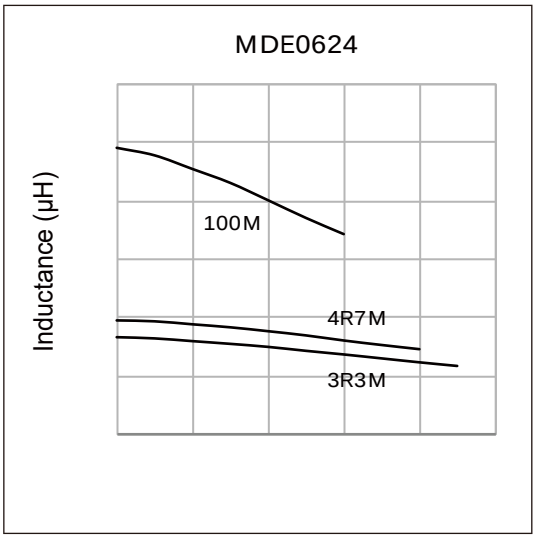
MDE0624
Inductance (µH)
100M
4R7M
3R3M

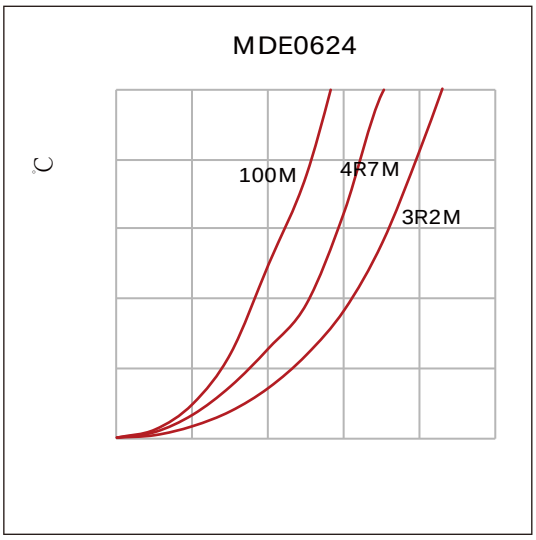
MDE0624
℃
100M
4R7M
3R2M