


MDE Series




FEATURES

-
-
- $^{\circ}\text{C}$ maximum total temperature operation
-
- Ultra low buzz noise due to molding construction
-
- Operating temperature range - 55 $^{\circ}\text{C}$ to + 125 $^{\circ}\text{C}$
- Quantity: 500pcs


APPLICATION

-
-
- Base stations
-
- Battery powered devices
-

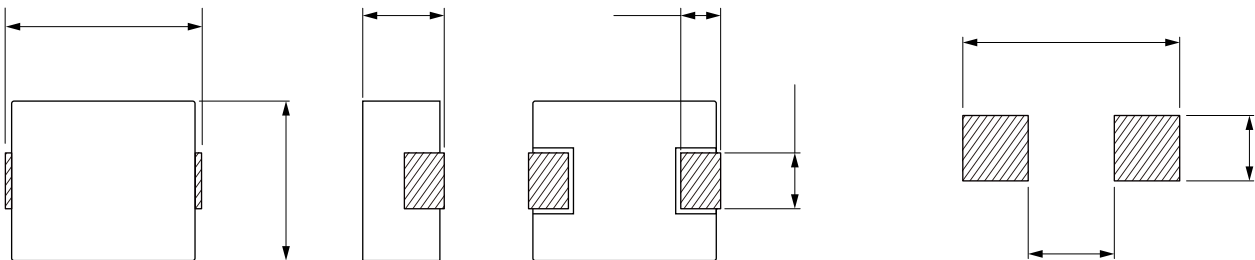

	(μH)		($\text{m}\Omega$)	Saturation	
MDE1050-R22M					
MDE1050-1R0M					
MDE1050-1R5M					
MDE1050-2R2M					
MDE1050-3R3M					
MDE1050-4R7M					
MDE1050-5R6M					
MDE1050-6R8M					
MDE1050-100M					
MDE1050-150M					
MDE1050-220M					
MDE1050-330M					
MDE1050-470M					
MDE1050-101M					



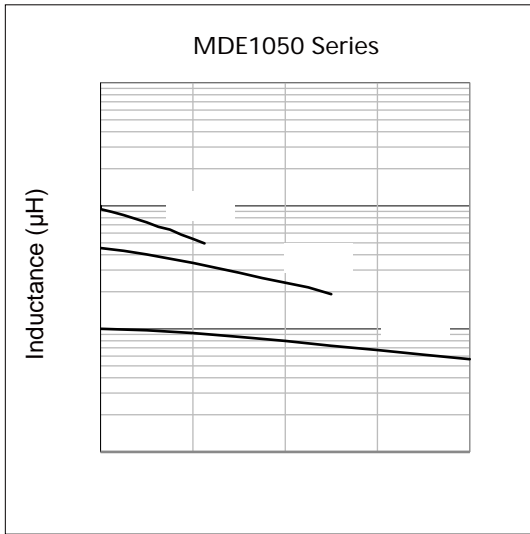

MDE1050 Series

C