

MDE Series




FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 C u p p p p
- Low core loss
- P p p p p
- Halogen Free & ROHS compliant
- p p p p
- p

APPLICATION

- p
- Switch and servers
- p
- p
- p
- SSD modules

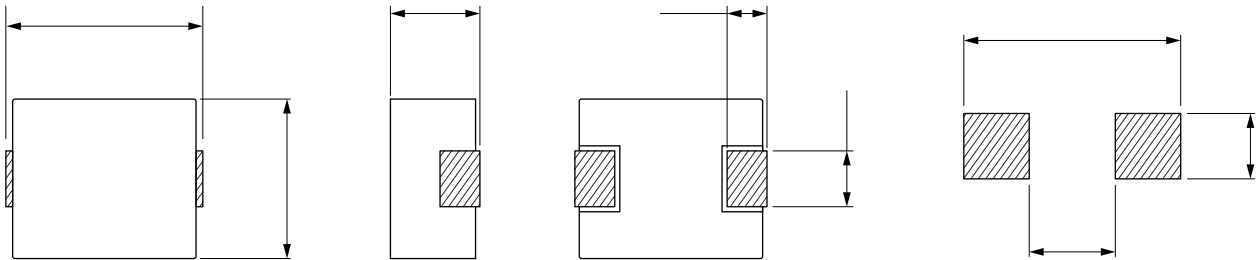

| | (μH) | | ($\text{m}\Omega$) | Saturation | |
|--|-------------------|--|----------------------|------------|--|
| | | | | 22.5 | |
| | | | 13.5 | | |
| | | | | 13.5 | |
| | | | | 12.5 | |
| | | | | | |
| | | | | | |
| | | | 39.5 | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | 235 | | |
| | | | | | |



