



**MDTA Series**  
 Flat Wire Molded Inductor  
 Size 6060



**FEATURES**

- 
- 
- 
- 
- 
- 
- 



⊕

**APPLICATION**

- 
- 

Dimensions: [mm]

Land Pattern: [mm]

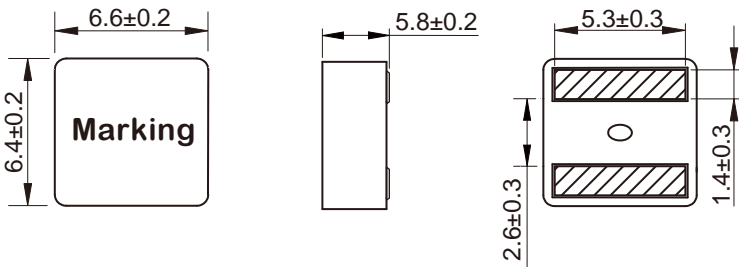


**Electrical Properties:**

Part No	L@100KHz /0.1V (μH)	Tolerance	I <sub>SAT</sub> Typ. (A)	I <sub>R</sub> (A)		R <sub>DC</sub> Max. (mΩ)
				20°C rise	40°C rise	

Saturation Current will cause L to drop approximately 30%  
 Temperature Rise Current that causes the specified temperature rise from 25°C ambient.



## Soldering Reflow:

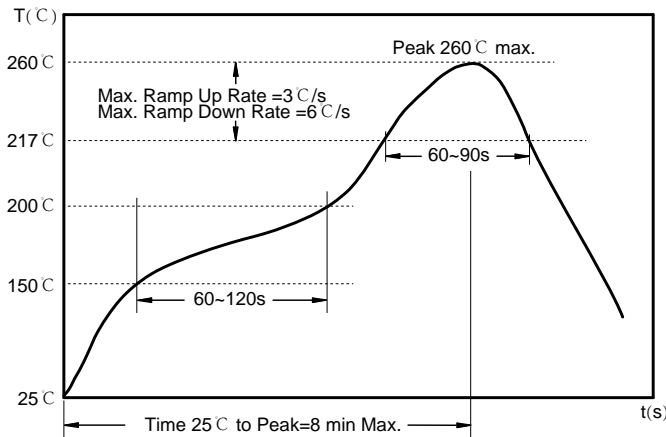

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C : 60~90 sec.


Max temperature: 260°C .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


## Packaging Information:

### Tape Dimension :

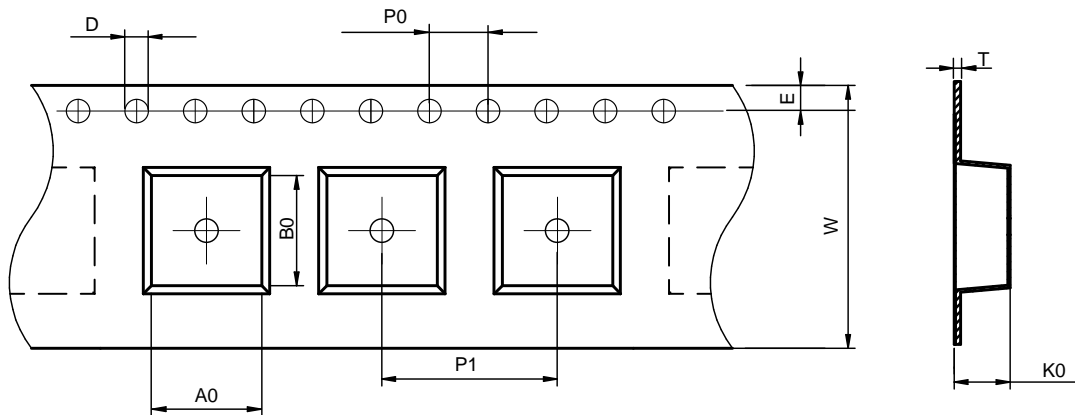

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTA6060	7.0± 0.1	6.8± 0.1	1.5± 0.1	4.0± 0.1	12.0± 0.1	16.0± 0.3	6.3± 0.1	1.75± 0.1	0.50± 0.05

### Peel force of top cover tape:

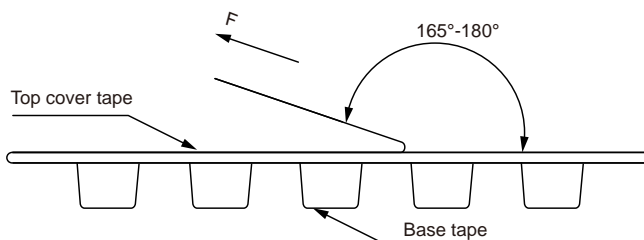

The peel force of top cover tape shall be between 0.1 to 1.3 N

### Product Marking:

Marking	Printing Inductance)
---------	----------------------



Reel Dimension: [mm]



Packaging Quantity: