


Wire Wound Molded SMD Power Inductors Size 1030




- So saturation
- High current, low DCR, high efficiency
- Very low acoustic noise and very low leakage flux noise
- High reliability
- 100% Lead (Pb)-Free and RoHS compliant
- Operating temperature -55~+125°C (Including self-temperature rise)
- Quantity: 1000pcs

- Note PC power system, incl. IMVP-6
- DC/DC converter

Dimensions: [mm]

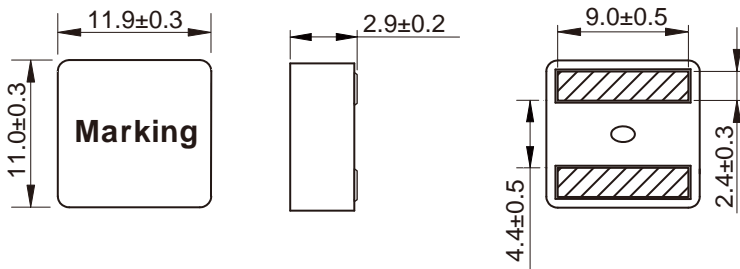

Land Pattern: [mm]

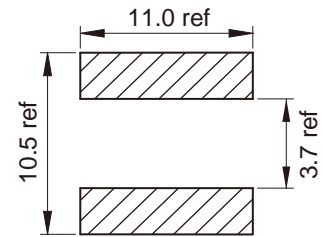


Electrical Properties:

| Part No | Inductance @ 100KHz/0.1V (μ H) | Tolerance | Saturation Current Typ. (A) | Saturation Current Max. (A) | Temperature Rise Current Typ. (A) | DC Resistance Max. (m Ω) |
|---------------|---|------------|--------------------------------------|--------------------------------------|--|---|
| MDTE1030-R28M | 0.28 | $\pm 20\%$ | 65.0 | 58.0 | 35.0 | 1.60 |
| MDTE1030-R56M | 0.56 | $\pm 20\%$ | 44.0 | 39.0 | 32.0 | 2.75 |
| MDTE1030-R82M | 0.82 | $\pm 20\%$ | 38.0 | 32.0 | 25.0 | 4.10 |
| MDTE1030-R90M | 0.90 | $\pm 20\%$ | 36.0 | 31.0 | 24.0 | 4.20 |
| MDTE1030-1R0M | 1.00 | $\pm 20\%$ | 35.0 | 30.0 | 23.0 | 4.95 |
| MDTE1030-1R5M | 1.50 | $\pm 20\%$ | 30.0 | 25.0 | 18.0 | 6.60 |

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Soldering Reflow:

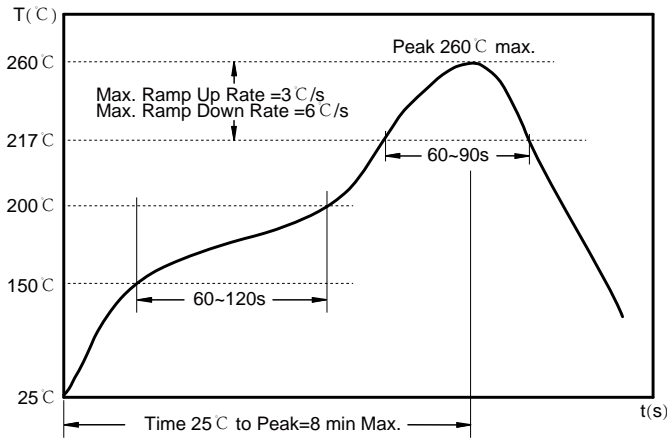

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C: 60~90 sec.


Max temperature: 260°C.

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension:

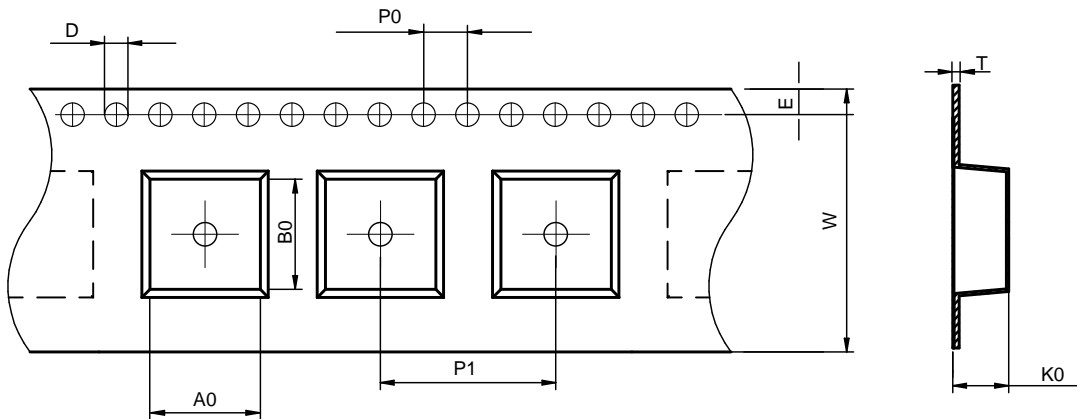

| Series | A0 (mm) | B0 (mm) | D (mm) | P0 (mm) | P1 (mm) | W (mm) | K0 (mm) | E (mm) | T (mm) |
|----------|----------|----------|---------|---------|----------|----------|---------|----------|-----------|
| MDTE1030 | 12.4±0.1 | 11.5±0.1 | 1.5±0.1 | 4.0±0.1 | 16.0±0.1 | 24.0±0.3 | 3.3±0.1 | 1.75±0.1 | 0.35±0.05 |

Peel force of top cover tape:

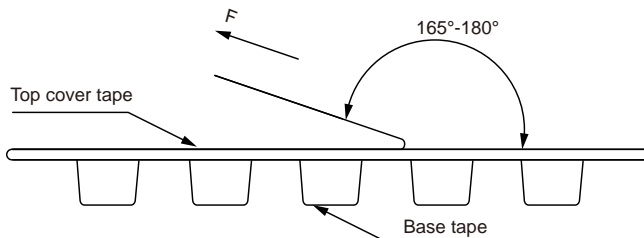


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

| | |
|---------|-----------------------|
| Marking | Printing (Inductance) |
|---------|-----------------------|

Reel Dimension: [mm]



Packaging Quantity: