


Saturation Current will cause L to drop approximately 10%

## Soldering Reflow:

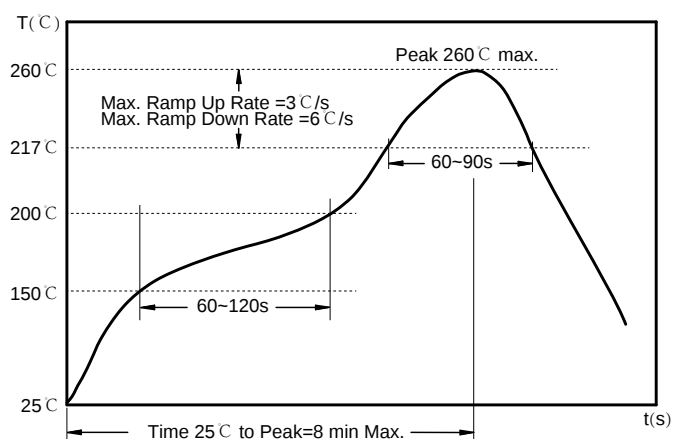


Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.

Max temperature: 260 °C .


## Packaging Information:

### Tape Dimension :

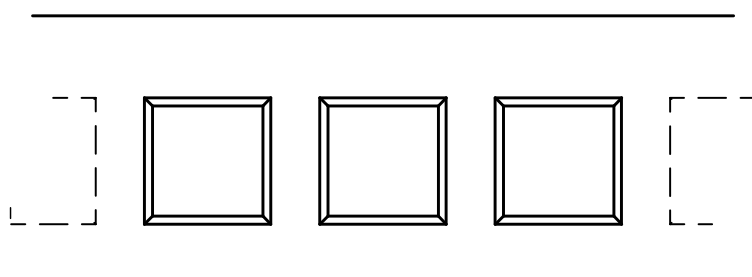

| Series | A0<br>(mm) | B0<br>(mm) | D<br>(mm) | P0<br>(mm) | P1<br>(mm) | W<br>(mm)  | K0<br>(mm) | E<br>(mm)  | T<br>(mm)   |
|--------|------------|------------|-----------|------------|------------|------------|------------|------------|-------------|
| WI4532 | 3.45 ± 0.1 | 4.70 ± 0.1 | 1.5 ± 0.1 | 4.0 ± 0.1  | 8.0 ± 0.1  | 12.0 ± 0.3 | 3.15 ± 0.1 | 1.75 ± 0.1 | 0.40 ± 0.05 |

### Peel force of top cover tape:

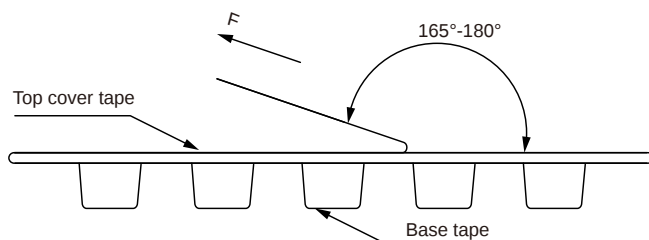


The peel force of top cover tape shall be between 0.3 to 1.17 N


### Product Marking:

| Marking | Printing Inductance) |
|---------|----------------------|
|---------|----------------------|

## Reel Dimension: [mm]

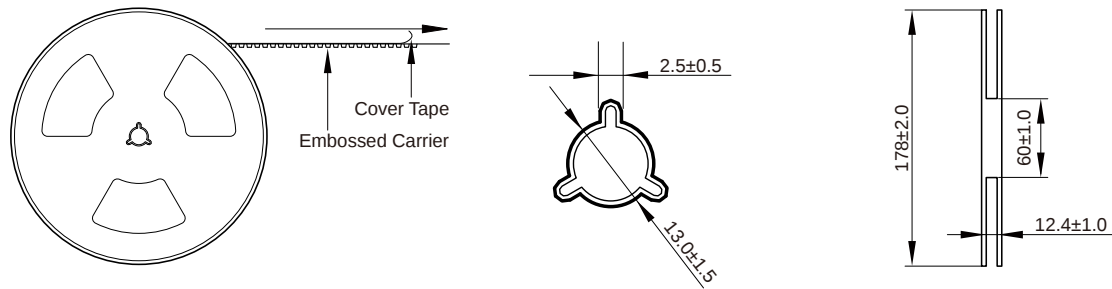

## Packaging Quantity:

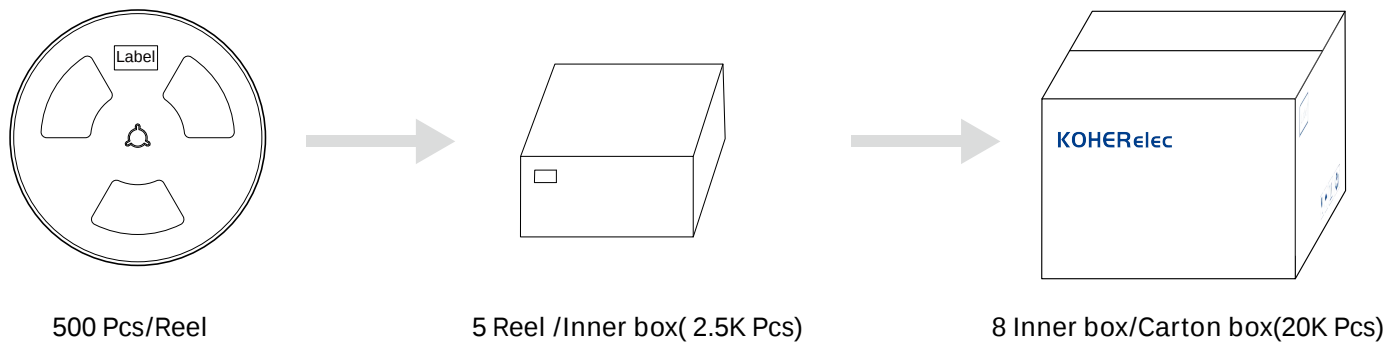

## Cautions and Warnings:

### Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature:  $-5$  to  $35^{\circ}\text{C}$ , humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed  $150^{\circ}\text{C}$ .
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.