


WWCI Series

CHARACTERISTICS

- ± 0.5% tolerance
- U = 1000V
- o = 1000V
- j = 1000V

APPLICATION


- = 7

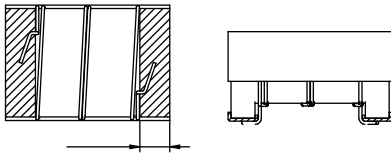

Part No	Inductance (nH)	Test Condition @MHz	Tolerance	Q Min.	Temperature Rise Current Max. (mA)	DCR Max. ()	SRF Min. (MHz)
† † #@	V8		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	V8		%				
† † #@	VK		%				
† † #@	k K		%				
† † #@	k 8		%				
† † #@	k K		%				
† † #@	k K		%				
† † #@	k 8		%				
† † #@	k K		%				
† † #@	k K		%				
† † #@	k K		%				
† † #@	k K		%				
† † #@	k K		%				
† † #@	k K		%				

\

 u

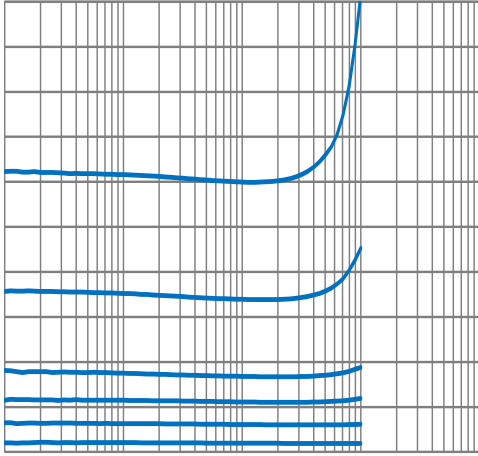

C

