



MDTE Series

Wire Wound Molded SMD Power Inductors

Size 5050




FEATURES

- So saturation
- High current, low DCR, high efficiency
- Very low acoustic noise and very low leakage flux noise
- High reliability
- 100% Lead(Pb)-Free and RoHS compliant
- Operating temperature -55~+125°C (Including self-temperature rise)
- Quantity: 1500pcs


APPLICATION

- Note PC power system, incl. IMVP-6
- DC/DC converter

Dimensions: [mm]

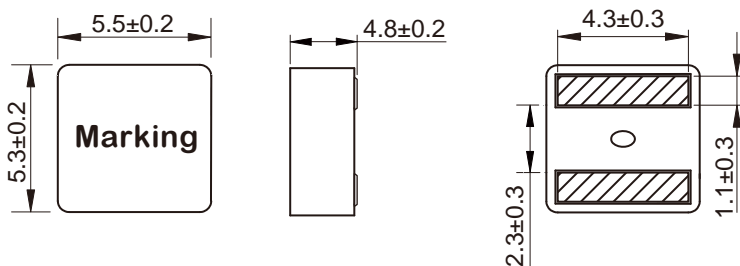

Land Pattern: [mm]




Electrical Properties:

			Saturation			(mA)
			(A)	(A)	(A)	
MDTE5050-5R6M	5.6	±20%	8.6	7.2	7.2	24.20
MDTE5050-6R8M	6.8	±20%	7.8	6.6	6.4	28.60
MDTE5050-8R2M	8.2	±20%	7.2	6.1	6.1	32.50
MDTE5050-100M	10	±20%	6.5	5.4	5.0	43.00
MDTE5050-150M	15	±20%	3.7	3.2	3.9	76.70
MDTE5050-220M	22	±20%	3.6	3.0	3.4	99.65

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$


Soldering Reflow:

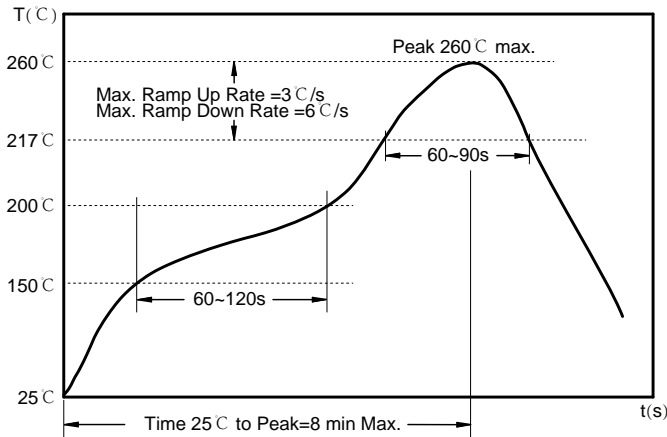

Preheat condition: 150 ~200°C / 60~120 sec.
 Allowed time above 217°C: 60~90 sec.
 Max temperature: 260°C.
 Max time at max temperature: 10 sec.
 Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension:

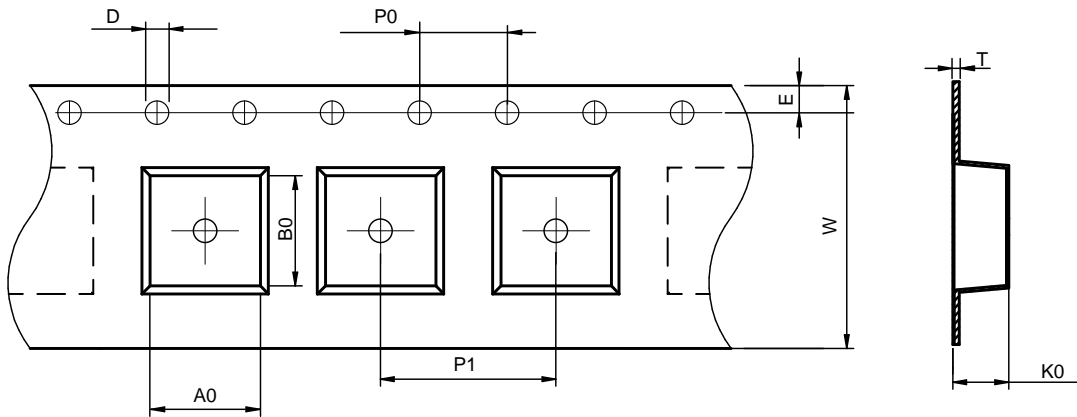

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTE5050	6.0±0.1	5.7±0.1	1.5±0.1	4.0±0.1	8.0±0.1	16.0±0.3	5.3±0.1	1.75±0.1	0.35±0.05

Peel force of top cover tape:

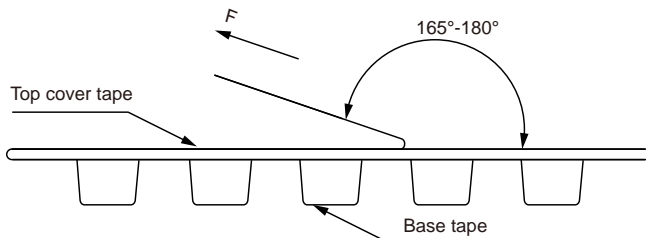


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

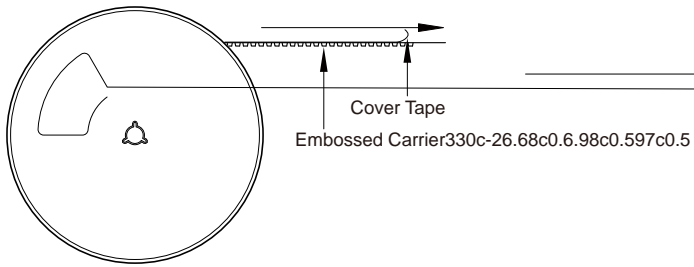

Packaging Quantity: